＊ 所有原料材质,生产制程,电镀必须符合ROHS要求

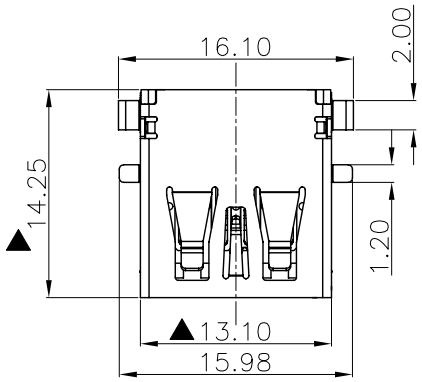



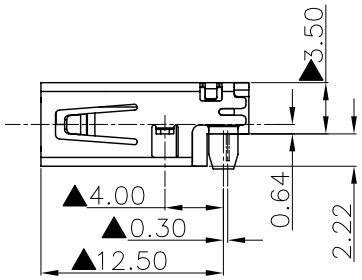

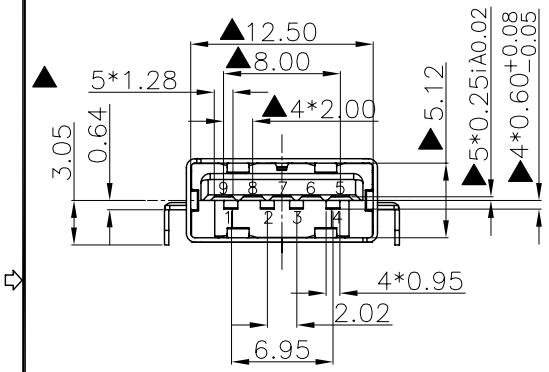



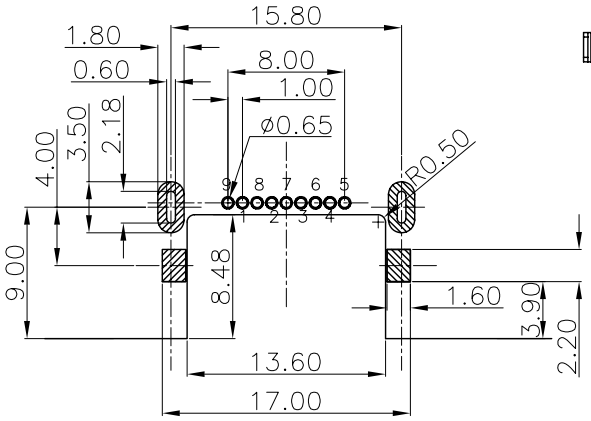

RECOMMENDED P.C.B LAYOUT(1.0~1.60)

Tolerance:±0.05

NOTES:

1.ELECTRONIC:
- CONTACT RESISTANCE: 30mohm MAX
- INSULATION RESISTANCE: 1000 Mohm MIN
- WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:
- STANDARD DURABILITY: 1500 CYCLES.
- HIGH DURABILITY: 5000 CYCLES

3.ENVIRONMENT CHARACTERISTICS:
- OPERTING TEMPERATURE:-25°C TO +85°C

4.PART NO.

SUS F 009 9 XX 2 023 PK

- SUS: USB SERIES
- F: FEMALE
- 009: 9PIN
- 9: PITCH SERIES
- XX: 00=GOLD FLASH, 05=5U" AU, 15=15U"AU
- 2: 2=DIP TYPE
- 023: RUNNING NO.
- PK

5.标有"▲"为重点管控尺寸。

6.MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	COPPER ALLOY	NI PLATED
2	CONTACT	9	COPPER ALLOY	AU/TIN PLATED
1	HOUSING	1	LCP	(UL 94V-0) BLACK

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE

深圳市鑫南天科技有限公司
Shen zhen Xin Nan Tian Technology Co., Ltd

DIMENSIONS INIT: mm
UNLESS OTHERWISE SPECIFIABLE

DIMENSION	TOLERANCE		
LINEAR		ANGLE	
X.	±0.38	X.	±3°
X.X	±0.25	X.X	±1°
X.XX	±0.15	X.XX	±0.5°

PRODUCT NAME : USB 3.0 AF-sinking 2.22mm -Top mount3.5H - Terminal:DIP Shell Hydrid type-with flange	DRAWING: COCO	DATE: 2008/08/08	
PRODUCT NO. : SUSF0099002023PK	CHECK: JANY	DATE: 2008/08/08	
DRAWING NO. : XNT-0092	APPROVED: JEFF	DATE: 2008/08/08	
	SCALE: 1:1	DWG ID: P D	REV.: A / PAGE: 1 OF 1