


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

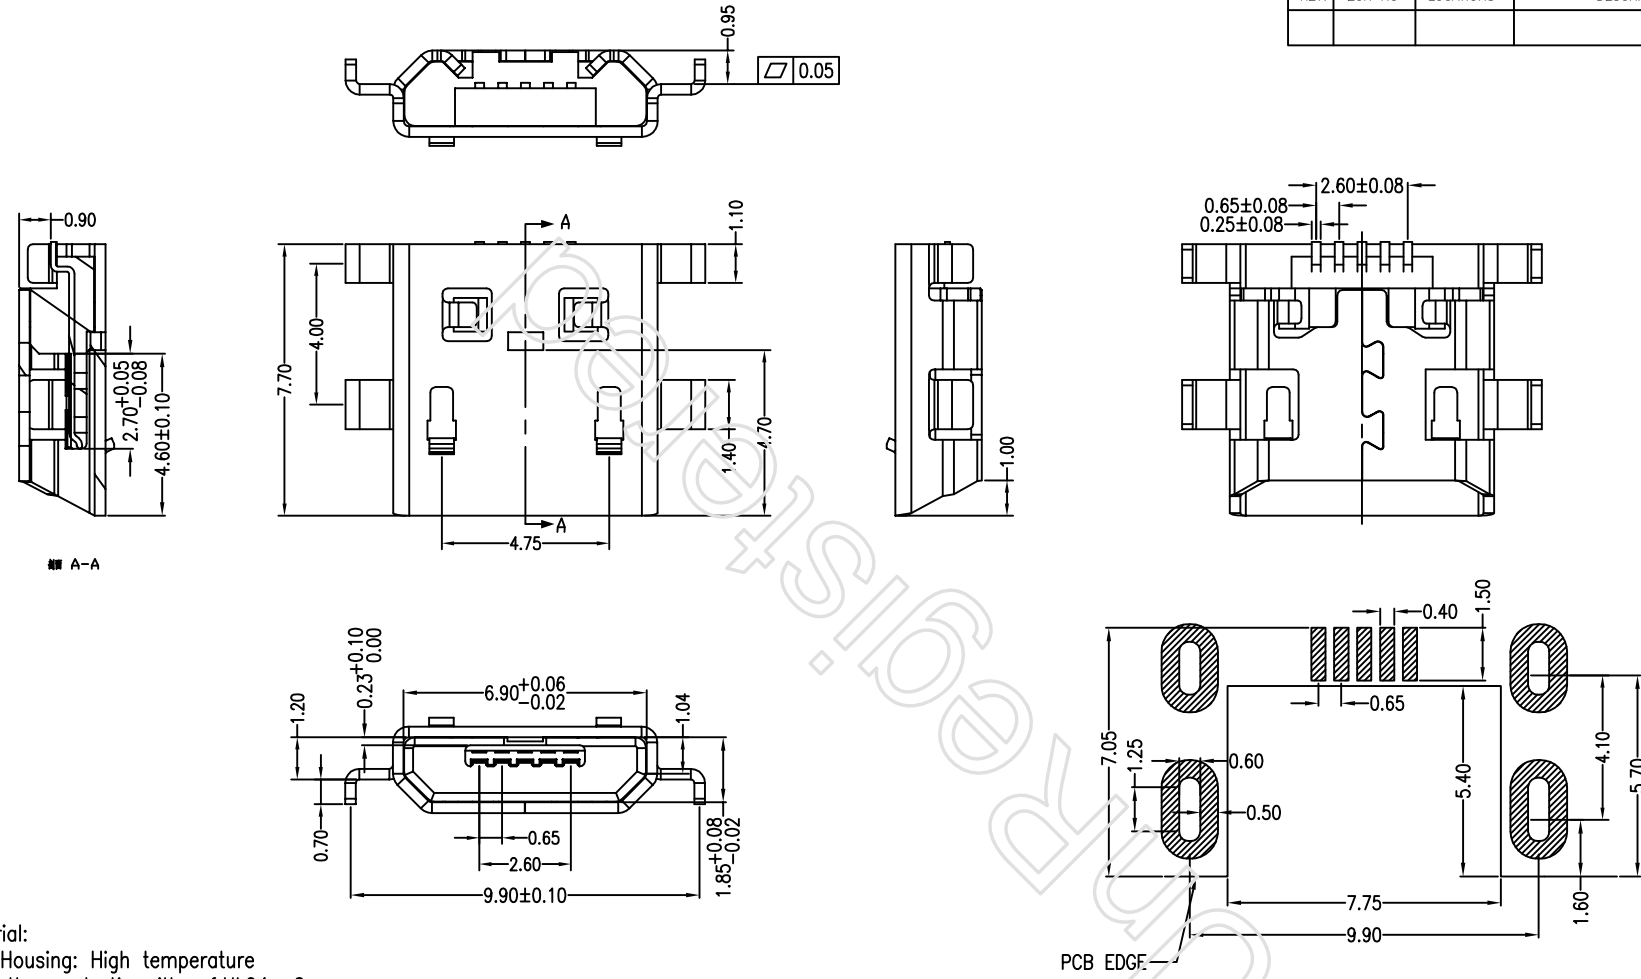

■ A-A

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.03  
PCB圖仅供参考

Note:

1. Material:

- 1.1 Housing: High temperature thermoplastic with g.f, UL94v-0
- 1.2 Contact: copper alloy, t=0.15mm
- 1.3 Shell: copper alloy, t=0.30mm

2. Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 MΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

PART NO:		MATERIAL: SEE NOTE		深圳市鑫南天科技有限公司 Shen Zhen Xin Nan Tian Industrial Co.,Ltd	
MODEL NO: XX		FINISH: SEE NOTE			
UNIT: MM	SIZE: A4	COLOR: SEE NOTE		TITLE: MICRO USB 5S B TYPE SMT沉板0.9斜口	
TOLERANCE UNSPECIFIED		DR: xiayouhong		DWG NO: A348	
.x	±0.15	CHK:		REV: A	
.xx	±0.10	APP:		SCALE: 5:1	
.xxx	±0.05			DATE: 2012.05.22	
Ang.	±1°				