
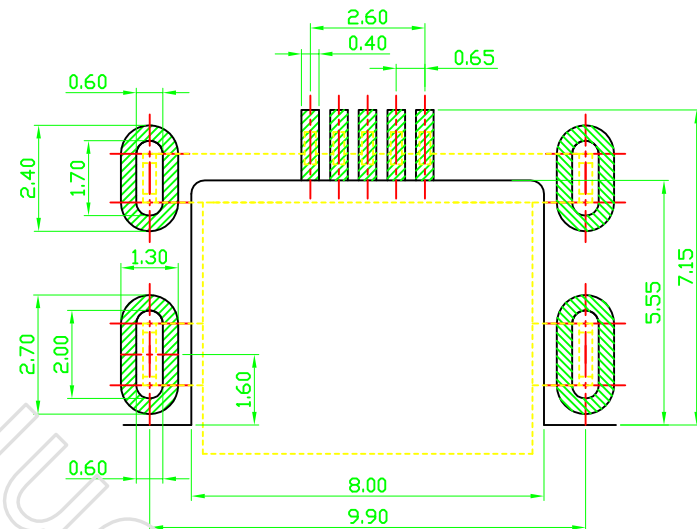
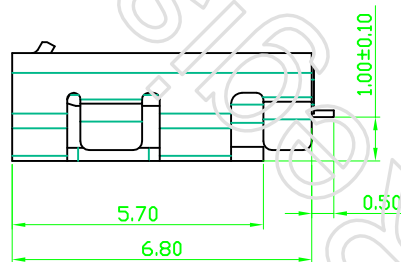
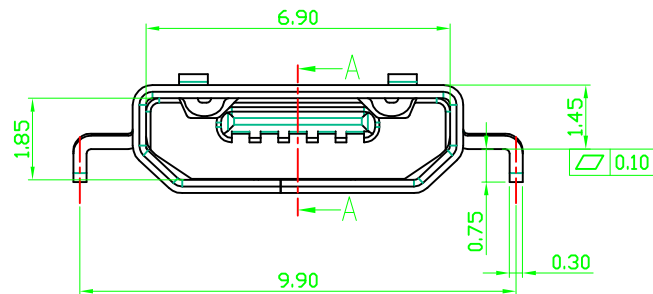
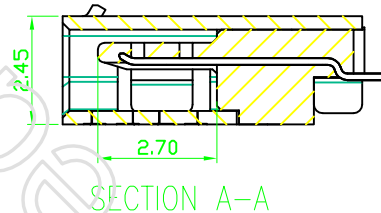


REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版发行	DMX	DMX	2014.03.19



NOTES:

SPECIFICATION:

- 1.1 CURRENT RATING: 1.0A MAX
- 1.2 VOLTAGE: 100 VAC
- 1.3 TEMPERATURE RANGE: -30 °C ~ 85 °C
- 1.4 CONTACT RESISTANCE: 30 MILLIONHM MAX
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 200 VAC r.m.s
- 1.6 INSULATION RESISTNACE: 100 MEGOHMS MIN.

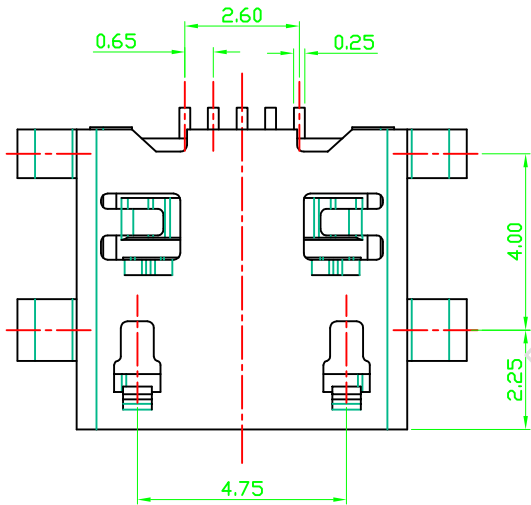

RECOMMEND PCB LAYOUT  
GENERAL TOLERANCE ±0.05

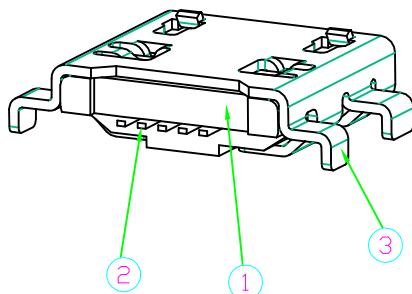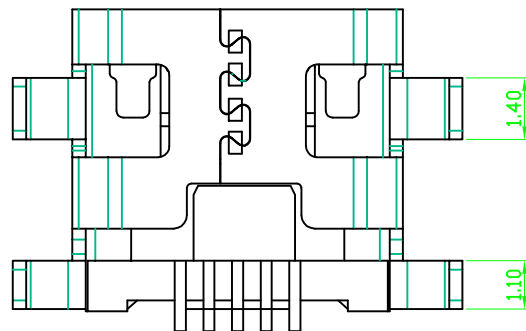

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
3	SHELL	STAINLESS STEEL MATTE T=0.30mm	TIN/NI Plated	1PCS
2	CONTACT	COPPER ALLOY T=0.15mm	Au/NI Plated	1SET
1	HOUSING	High temperature plastic	BLACK	1PCS

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	深圳市鑫南天科技有限公司 SHEN ZHEN XIN NAN TIAN INDUSTRIAL CO., LTD		
X.X ±0.30	X.' ± 2'	PART NO.	TITLE: MICRO USB 5P 沉板 1.0 四脚插板加长型成品		
.XX ±0.20	.X' ± 1'	010101010-093	DRAWG NO. 0101-0930		
.XXX ±0.10	.XX' ±0.5'	APPD: COCO	SCALE	SHEET	REV.
UNITS	mm	CHED: COCO	1:1	1/1	A
MATERILA		DRAW: JEFF			
FINISH					