


RoHS

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A	N/A		初始版本	2016.10.12	Jerry Li

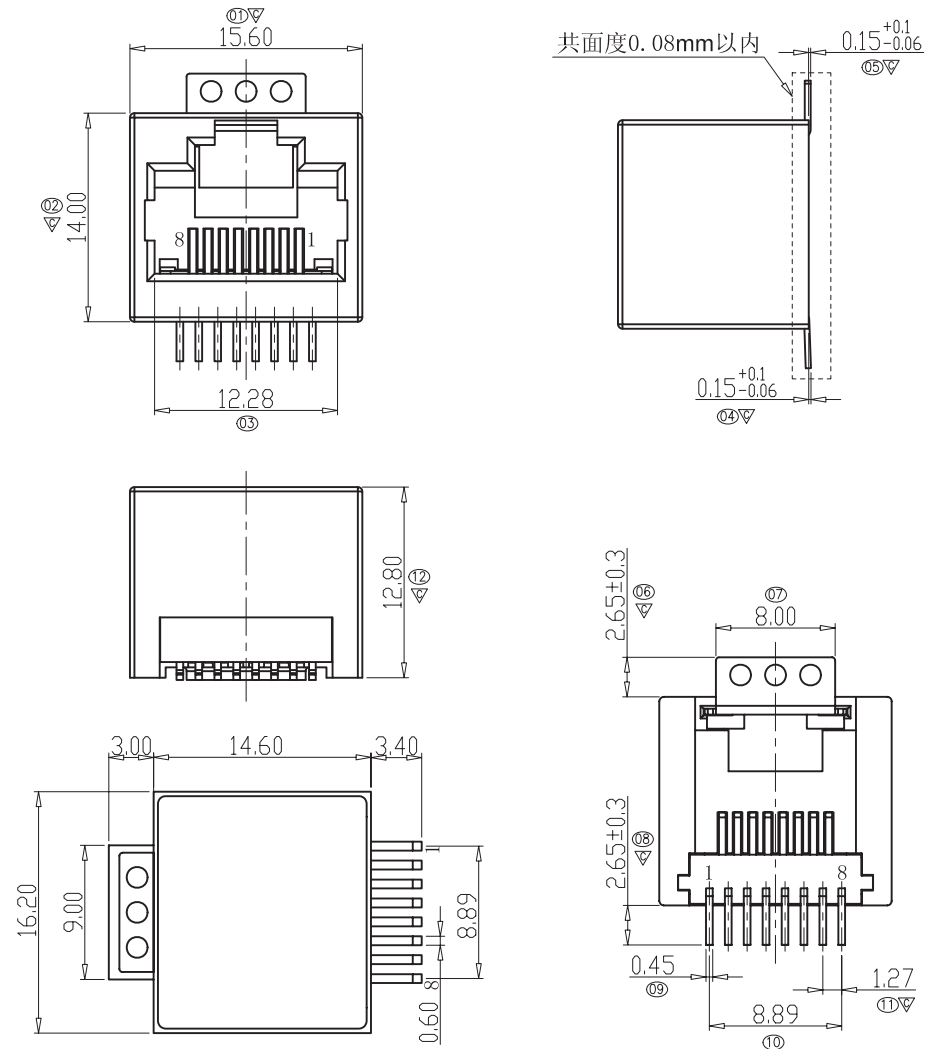

PCB LAYOUT/TOP VIEW
TOLERANCE=±0.05

ELECTRICAL:

CURRENT RATING:1.5AMPS
 VOLTAGE RATING:125V AC
 INSULATION RESISTANCE:500M MINI
 WITHSTAND VOLTAGE:AC 1000V RMS 50Hz OR 60Hz 1MIN
 CONTACT RESISTANCE:20m MAX

MECHANICAL:

MATING FORCE: 2.2KG. F MAX
 RETENTION STRENGTH:7.7KG. F BETWEEN JACK AND PLUG
 DURABILTY:750MATING CYCLES MINI

MATERIAL:

HOUSING:LCP, UL94V0
 CONTACT WIRE:0.35mm DIAMETER PHOSPHOR BRONZE (C5191)
 OPTIONAL GOLD PLATING
 GOLD PLATING: 3 INCH, 6 INCH, 15 INCH, 30 INCH, 50 INCH
 METAL GASKET : 0.40mm THICKNESS, NICKEL PLATED COPPER ALLO (C2680)
 IR REFLOW SOLDERING TRMPATURE:265℃ (5 SECONDS)

 UNIT: mm [inch] TOLERANCE: Unless Otherwise Specification All Tolerance Are :±0.25mm SCALE:1:1 SIZE:A4	深圳市鑫南天科技有限公司			
	DESIGN:	Jerry	PART NAME: 180D 全塑无灯 8P8C LCP	
	CHECKED:	Jerry	PART NO.	XNT-113B000-0001
	APPROVED:	J Mou	DRAW NO.	XNT-641-A
		SHEET NO.	01 OF 01	