



* All Raw Material, Manufacturing, Plating process comply with ROHS

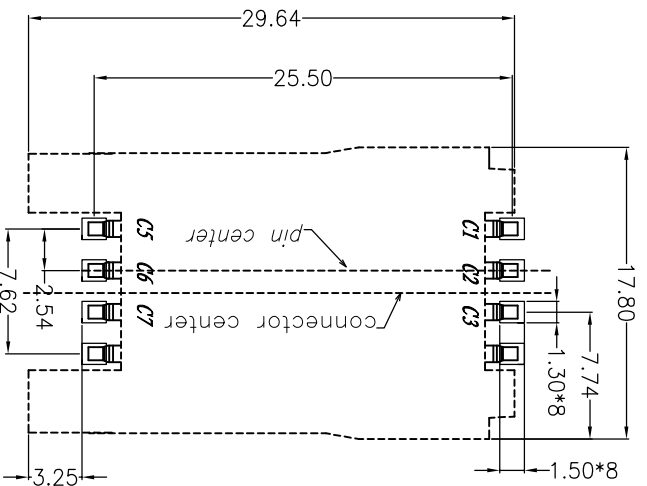

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05



SIM卡引脚功能定义

触电极号	分 配	触电极号	分 配
C1	电源电压 VCC	C5	地 GND
C2	复位 RST	C6	编程电压 VPP
C3	时钟 CLK	C7	输入/输出 I/O
C4	Reserved 备用	C8	Reserved 备用



Technical Speciality
 技术特性
 Rated Voltage: 50V AC/DC Max
 Current Rating: 1.0A Max
 额定电压: 50V AC/DC Max
 额定电流: 1.0A Max
 Insulation Resistance: 1000MΩ Min
 绝缘电阻: 1000MΩ Min
 Contact Resistance: 100mΩ Max
 接触电阻: 100mΩ Max
 Withstand Voltage:
 耐压: 500V AC/minute
 Operating Temperature: -40°C ~ +85°C
 工作温度: -40°C ~ +85°C

REMARKS:

- 附注:
 1. MATERIAL:
 材料:
 1.1 HOUSING: THERMOPLASTIC
 本体: 热塑性塑料
 COLOR: WHITE
 颜色: 白色/黑色
 1.2 COVER: THERMOPLASTIC
 盖子: 热塑性塑料
 COLOR: WHITE
 颜色: 白色/黑色
 2. PLATING:
 表面处理:
 2.1 CONTACT:
 NICKEL AND 50μ" MIN CONTACT 1μ" PAD TIN 50μ" /MIN
 接触件: 镀镍底50μ", 接触点金1μ", 焊脚锡50μ"。



深圳市鑫南天科技有限公司
 Shen zhen Xin Nan Tian Technology Co., Ltd

DIMENSIONS INT: ■		DIMENSIONS INT: ■	
UNLESS OTHERWISE SPECIFIABLE	TOLERANCE	PRODUCT NAME:	DATE:
X.X ±	0.15	SIM接触式9pin	COCO
X.XX ±	0.10	PRODUCT NO.:	2017/11/10
X.XX ±	0.05	04312AAS02A	JANY
ANGLE ±	1°	DRAWING NO.:	2017/11/10
		XNT-043	林心祥
		SCALE:	DATE:
		1:1	2017/11/10
		DWG. NO.:	DATE:
		C.D	2017/11/10
		REV.:	DATE:
		A	2017/11/10
		SCALE:	DATE:
		1:1	2017/11/10