
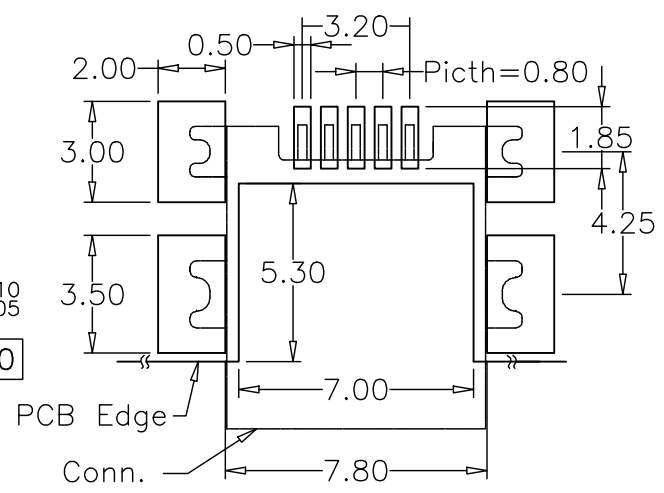
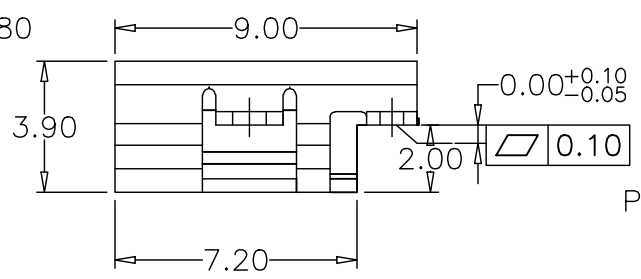
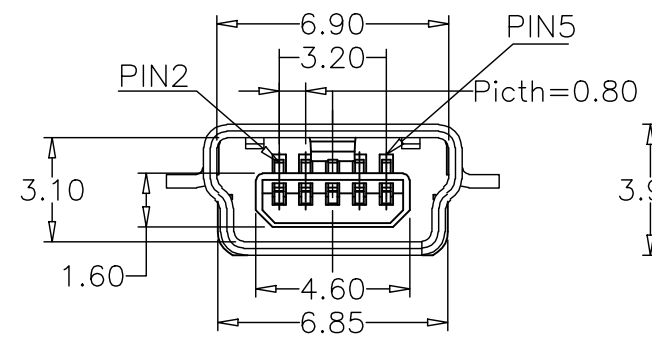


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
AO			INITIAL RELEASE	07/2/25	胡益新

NOTE:

- 1.MATERIAL:
 1.1 HOUSING: PA9T,UL 94V-0 COLOR: BLACK.
 1.2 CONTACT: COPPER ALLOY
 1.3 SHELL: COPPER ALLOY
 2.FINISH:
 2.1 CONTACT: GF GOLD FLASH OVER NICKEL
 2.2 SHELL: NICKEL OVER COPPER
 3.PART NO.
 MUJ104-xx-x-TA xxG
 SERIES
 GF-CONTACT GOLD FLASH OVER NICKEL
 03G-CONTACT 3u"GOLD OVER NICKEL
 05G-CONTACT 5u"GOLD OVER NICKEL
 15G-CONTACT 15u"GOLD OVER NICKEL
 30G-CONTACT 30u"GOLD OVER NICKEL
 PACKING
 TA-EMBOSSED TAPE
 O-WITHOUT LOCATING PEG
 NO.OF CONTACTS
- 4.RATING:
 OPERATING VOLTAGE: 30V
 CURRENT RATING: 0.5A
 OPERATING TEMPERATURE:-20°C~+85°C

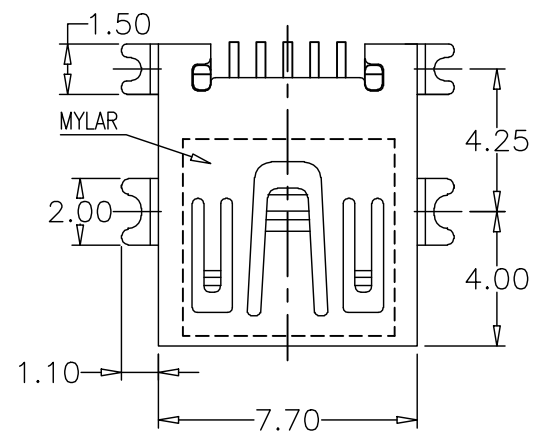

P.C.B LAYOUT

深圳市鑫南天科技有限公司

DIM	TOL	DIM	TOL
X.	±0.30	X'	±5.0'
X.X	±0.25	X.X'	±4.0'
X.XX	±0.20	X.XX'	±3.0'
X.XXX	±0.15	X.XXX'	±2.0'

DRAW NO.	DATE	DRAW NAME: PHD&mm MINI USB 5P FEMALE CONN. SMT TYPE 07/2/25	P/N NO.
DESIGN:		FILE:	
CHECK:		MODEL:	
APPROVED		REV. A0	SCALE 1/1
		UNIT: mm	SHEET: 1/1

